



Backhoe Loader

Capacity: 1.1 cu.m./0.24 cu.m.

Engine: Kirloskar 4R1190NA1, 74 HP

Mahindra MCVNC35TI095CE4, 95 HP







Specifications PhanTom


	7		
Engine	Kirloskar 4R1190NA1 (BS-IV)	Turning Radius	
	4 cylinder, inline water cooled Naturally Aspirated diesel engine	 Without Brake 	4.4 metres
	delivering 74 HP @ 2200 rpm	With Brake	3.5 metres
Max Torque	300 Nm @ 1300 rpm	Refill Capacities	
		Hydraulic Tank:	80 ltrs.
Transmission	Synchro shuttle transmission with torque converter & synchronised	·	
	gear box. Single switch forward- reverse function for better loading	• Fuel Tank:	150 ltrs.
	application with 4 forward & 4 reverse speeds. Max speed 40 kmph	Engine Oil:	11.5 ltrs.
Axle	Front : Drive (In case of 4 WD)	Transmission & Torque Converter:	17 ltrs.
	& Steer Axle, centrally pivoted	o Door Ando	O lives
	Rear : Rigid axle with CARRARO planetary drive.	Rear Axle (Planetary gear box):	3 ltrs.
		Differential Housing:	14.5 ltrs
Steering	Hydrostatic steering for reliability and better control.	Tyres	
Brakes	Hydraulically actuated wet disc brakes at rear wheels with twin	• Front 2WD :	9.00 - 16 – 16 PR 12.5 / 80 – 18-12 PR
	pedals in cabin for better control.		
	Mechanically actuated disc brakes for parking.	Rear - Standard	16.90 - 28 – 12 PR
Cabin	ROPS fully enclosed wide view	Optional	6-in-1 loader bucket
	cabin with easy entry and exit from the cabin.	Equipment	 Rock Breaker
	nom the cabin.		Excavator bucket : 0.09 cu.m./0.12 cu.m. & 0.30 cu.m.
Hydraulic	Main Pump flow : 118 lpm		Heavy Duty Tyres (14.00 x 25)
System	Relief Pressure : 210 bar		A.C. Cabin
			Telematics
Electrical System	12V Battery with negative earth and suitable alternator.		
		Variant Model (4WD)	 Mahindra MCVNC35TI095CE4 (BS-IV), 4 cylinder, turbo charged,
Operating weight	8040 kgs. (2 WD) 8190 kgs. (4 WD)		water cooled diesel engine delivering 95 HP @ 2200 rpm 401 Nm@1200 rpm




Dimensions






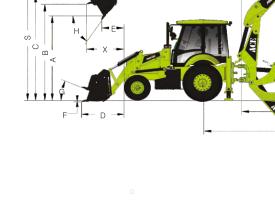

Static Dimensions	
A. OVERALL LENGTH	6.2 M
B. OVERALL HEIGHT	3.6 M
C. HEIGHT TO TOP OF CAB	2.9 M
D. WHEEL BASE	2.18 M
E. MIN GROUND CLEARANCE	0.35 M
F. SLEW GROUND CLEARANCE	0.66 M
WIDTH (OVER BUCKET)	2.50 M
TRACK WIDTH FRONT	1.84 M
TRACK WIDTH REAR	1.55 M

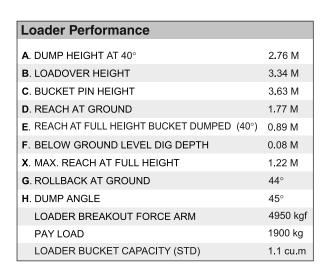

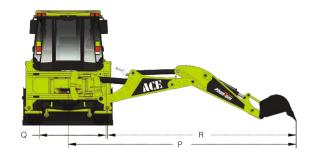

Phan om

Excavator Performance	
I. MAX. DIG DEPTH	4.25 M
J. REACH GROUND LEVEL TO REAR WHEEL CENTER	6.73 M
K. REACH GROUND LEVEL TO SLEW CENTER	5.50 M
L. MAX. WORKING HEIGHT	5.47 M
M. MAX. LOADOVER HEIGHT	3.79 M
N. REACH AT FULL HEIGHT TO SLEW CENTER	2.78 M
O. BUCKET ROTATION POWER	175°
P. SIDE REACH TO CENTER LINE OF MACHINE	5.59 M
Q. KING POST TRAVEL	0.9 M
R. REACH GROUND LEVEL TO STABILISER START POINT	4.45 M
S. FULL OPERATING HEIGHT	4.13 M
DIPPER TEAROUT FORCE	4000 kgf
EXCAVATOR BUCKET CAPACITY (STD)	0.24 cum


ILT TO PERFORI





RELIABLE AND DEPENDABLE **EFFICIENCY**

NETWORK

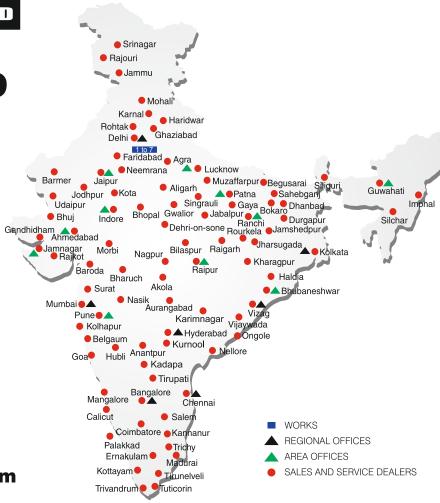



MARKETING H.Q.

4th Floor, Pinnacle Surajkund, NCR-121009 Ph.: +91-129-4550000 Fax: +91-129-4550022

E-mail: marketing@ace-cranes.com

REGISTERED OFFICE

Dudhola Link Road, Dudhola Palwal-121102, Harvana Ph.: +91-1275-280111 Fax: +91-1275-280133

CIN : L74899HR1995PLC053860

MUMBAI OFFICE

31, "Kalpataru Court" Chembur, Mumbai - 400074 Ph.: +91-22-25206846, 25207070

Fax: +91-22-25207071

E-mail: acemumbai@ace-cranes.com

KOLKATA OFFICE

"Forma Towers" 84-A. Second Floor AJC Bose Road, Kolkata - 700014 Ph: +91-9038070630

E-mail: acekolkata@ace-cranes.com

CHENNAI OFFICE

1st Floor, "Alsa Regency", 165 Eldams Road, Alwar Pet Chennai - 600018

Ph.: +91-44-24314253 Fax: +91-44-24314252

E-mail: acechennai@ace-cranes.com

HERE TO SERVE YOU.

SPARE PARTS & SERVICE

ACE has all India Sales and Service network operating out of all the major cities. These outlets are fully equipped to provide genuine spare parts and services by company trained engineers. These outlets are further supported by company officials based at Delhi, Mumbai, Chennai, Kolkatta, Ahmedabad, Surat, Pune, Jaipur, Chandigarh, Ranchi, Raipur, Indore, Bhubneshwar, Lucknow, Jamnagar, Hyderabad, Bangalore, Guwahati, Patna, Vizag & Kochi.



Action Construction Equipment Ltd.



ACE reserves the right to alter any specifications without prior notice. Dimensions, weights & capacities mentioned herein are variable by ± 5%. Accessories if shown are not part of the Standard Equipment.