

100%
Swadeshi

ACE COMPACTOR

Soil Compactor

Operating Weight : 11-12 Tonnes
High Static Linear Load

ACE INDIA'S NO. 1
CRANE BRAND





Soil Compactors

ASD Series

SPECIFICATIONS	UNIT	ASD115			ASD124		
		STD	DD	PD	STD	DD	PD
WEIGHTS							
Operating Weight	Kg	11000	11100	11900	12000	12100	12900
Drum Module Weight	Kg	6500	6600	7400	7060	7160	7960
Tyre Module Weight	Kg	4500			4940		
Static Linear Load	Kg/cm	30.52	30.98	34.74	33.14	33.61	37.37
No. of Pads		-	-	140	-	-	140
Pad Height	mm	-	-	100	-	-	100
Pad Area	cm ²	-	-	146	-	-	146
VIBRATION							
Amplitude (High/Low)	mm	1.85/0.8			1.80/0.8		
Frequency (High/Low)	Hz	40/33			40/33		
COMPACTION FORCE							
Centrifugal Force (High/Low)	KN	254/176			312/212		
Total Applied Force (High/Low)	Ton	32/24			38/28		
TRACTION							
Gradeability	%	45%	55%		37%	44%	
Oscillation Angle	deg	+/- 10					
Tyre Size		23.1x26 (12PR)					
STEERING							
Type		Hydrostatic steering					
Articulation Angle	deg	+/- 37					
Turning Radius	mm	3950/6050					
ENGINE							
Model/Type		Mahindra MCVNC35TI110CE4, BS-IV, 4 Cylinder water cooled turbocharged Diesel Engine					
Rated Power		110 hp/ 81 KW @ 2200 rpm					
HYDRAULIC & PROPULSION SYSTEM							
Drive		Hydrostatic drive, infinitely variable planetary axle with limited slip differential					
Working/Travel Speed	Km/hr	0-11					
Travel		Variable displacement axial piston pump and constant displacement motor					
Vibration		Variable displacement axial piston pump and constant displacement motor					
Steering		Gear pump with constant displacement					
Service Brake		Closed loop hydrostatic brakes on forward/reverse lever					
Parking Brake		Spring applied/hydraulically released multi disc brake mounted on the drum drive gear reducer & within rear axle					
ELECTRICALS & REFILL CAPACITIES							
Electrical System		12V - 130 AMP, DC					
Fuel Tank Capacity	ltrs	315					
Hydraulic Tank Capacity	ltrs	80					
Sump Capacity	ltrs	13.5					
Adblue	ltrs	20					
Coolant	ltrs	13					

Technical Parameter



Engine

Powerful Mahindra Engine generating 110 hp @ 2200 rpm meeting CEV Stage-IV Emission norms. High Torque, Fuel Efficient and High performance engine for any type of application.



Static Linear Load (Drum Weight)

High Drum weight ensures Higher Static Linear Load for best compaction with minimum no. of passes.




Axle

Heavy duty rear axle with limited slip differential for smooth and quite torque transfer suitable for tough Indian working conditions. Provides two speed range for fast inter site movements.



Frequency

Dual Frequency generates 40/33 Hz (vibrations per seconds) on high & low modes respectively. Ensures better and faster compaction on different layers & thickness.

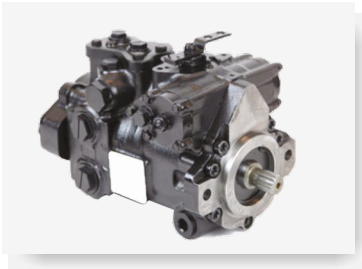

Hydraulics

Closed loop, high pressure hydraulic system ensures high productivity with better performance and reliability.



Amplitude

Dual amplitude mode of 1.85/0.8 mm generates greater force and results in quick compaction for different material & layers.



Gradeability

High Gradeability of 45% makes it effective under high gradient & low traction surfaces.



Centrifugal Force

High centrifugal force helps in unmatched performance and high productivity in minimum possible time.



Key Features



Structure

High Strength & Durable Structural parts for better reliability and longer life.



Vibration Pads

16 nos. of vibration pads installed on drum for shock absorption. Ensures minimal vibration transfer to operator platform.



Service Comfort

Newly designed engine hood providing easy access from ground level for daily maintenance checks and serviceability.



Visibility

Good all around visibility (1 meter by 1 meter) provides safe and efficient operation.



ACE



Operator Comfort

Vibration proof operator platform for minimum fatigue during long working period. Adjustable operator seat, lockable console cover, rear view mirror and large canopy for ease of operation.



Electricals

Ergonomically placed instrument cluster comprising of Engine oil pressure, Water temperature, Fuel gauge, RPM & Hour meter. Sealed electrical connectors provides protection against dust & moisture.





Tyre

Heavy duty tyre of size 23.1x26, 12 ply rating. Ensures adequate tyre life.

Optional



- Drum drive offers better traction and compaction in loose soil condition and hilly areas.
- Pad foot drum ideally suited for compacting soils with high clay content.

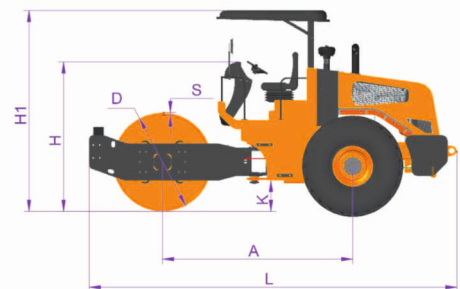

Dimensions in mm


	A	B	D	H	H1	K	L	O	S	W
ASD115	2980	2285	1530	2340	3100	450	5400	75	25	2130
ASD124							5720		32	

BUILT TO PERFORM



RELIABLE AND DEPENDABLE EFFICIENCY

NETWORK

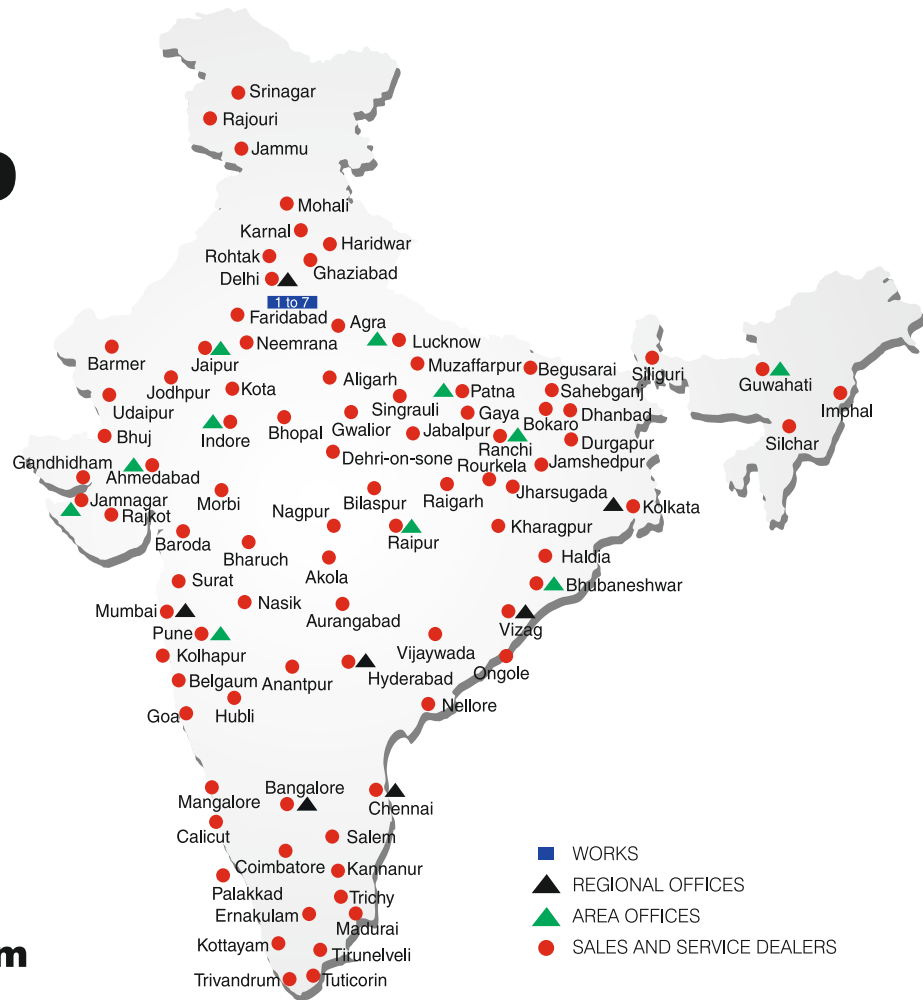

Toll Free Help Line
1800 1800 004

www.ace-cranes.com

MARKETING H.Q.

4th Floor, Pinnacle
 Surajkund, NCR-121009
 Ph.: +91-129-4550000
 Fax: +91-129-4550022
 E-mail: marketing@ace-cranes.com

REGISTERED OFFICE

Dudhola Link Road, Dudhola
 Palwal-121102, Haryana
 Ph.: +91-1275-280111
 Fax: +91-1275-280133
 CIN: L74899HR1995PLC053860

MUMBAI OFFICE

31, "Kalpataru Court"
 Chembur, Mumbai - 400074
 Ph.: +91-22-25206846, 25207070
 Fax: +91-22-25207071
 E-mail: acemumbai@ace-cranes.com

KOLKATA OFFICE

"Forma Towers" 84-A, Second Floor
 AJC Bose Road, Kolkata - 700014
 Ph.: +91-9038070630
 E-mail: acekolkata@ace-cranes.com

CHENNAI OFFICE

1st Floor, "Alsa Regency", 165
 Eldams Road, Alwar Pet
 Chennai - 600018
 Ph.: +91-44-24314253
 Fax: +91-44-24314252
 E-mail: acechennai@ace-cranes.com

HERE TO SERVE YOU.

SPARE PARTS & SERVICE

ACE has all India Sales and Service network operating out of all the major cities. These outlets are fully equipped to provide genuine spare parts and services by company trained engineers. These outlets are further supported by company officials based at Delhi, Mumbai, Chennai, Kolkatta, Ahmedabad, Surat, Pune, Jaipur, Chandigarh, Ranchi, Raipur, Indore, Bhubneshwar, Lucknow, Jamnagar, Hyderabad, Bangalore, Guwahati, Patna, Vizag & Kochi.



Action Construction Equipment Ltd.

Contact:

[Empty box for contact information]



ACE reserves the right to alter any specifications without prior notice. Dimensions, weights & capacities mentioned herein are variable by ± 5%. Accessories if shown are not part of the Standard Equipment.